

MARGARET

SELF ELEVATING PLATFORM



VESSEL SPECIFICATION SHEET



OVERVIEW

Self elevating platform able to be disassembled for road transport.

PRINCIPAL PARTICULARS

Length overall	24.40m	Maximum pay load	300t
Width	18.30m	Deck loading	10t/m2
Max extension	24m below hull with 32m spud	Draft max load	1.61m even keel (.5m freeboard)
Jacking System	Hyd cylinders, Manual controls & lockers	Jacking Speed	5m/hr

SURVEY

Registry	AMSA 2C	Official / UVI#	442417
Class	Bureau Veritas 1*Hull	Crew	2 Crew, 18 special pax

OPTIONS


Platform transports on 17 trailers including winches and hydraulic power pack (15 out of gauge, 2 in). 4 of 31m x 1.2m x 44.5t legs or 4 of 24m x 1.2m x 25t legs available. 600mm diameter Moon pool in pontoon 214E. Supply of crane mats and loading ramps for walking machinery on/off subject to availability. Full set of perimeter handrails.
Has had 200t crawler complete 43t lifts @ 18m radius in past.

MARGARET

SELF ELEVATING PLATFORM



GENERAL ARRANGEMENT

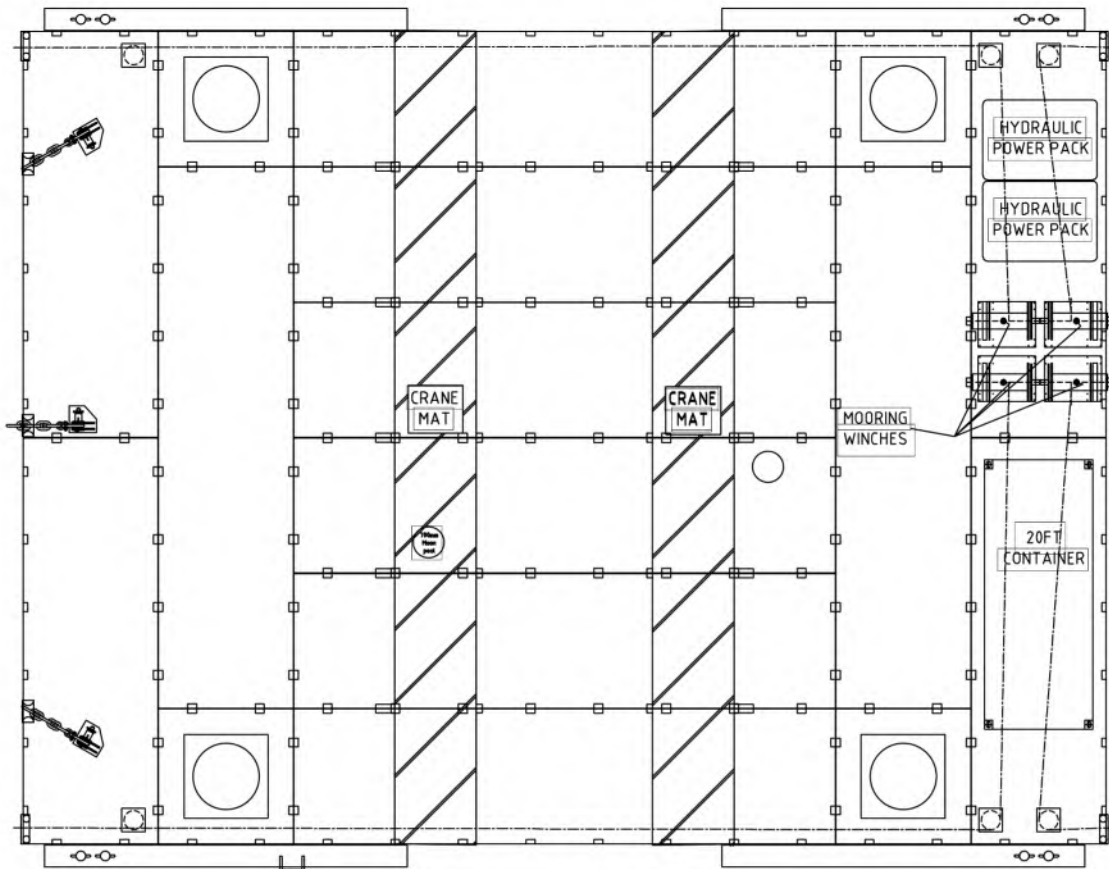

The data on this specification sheet has been published in good faith and should be considered for general information purposes only. It does not warrant its accuracy or completeness and to the full extent allowed by law excludes liability.